

(12) UK Patent Application (19) GB (11) 2 256 422 (13) A

(43) Date of A publication 09.12.1992

(21) Application No 9108993.8

(22) Date of filing 26.04.1991

(71) Applicant
David Kennedy (Engineers) Holdings Limited

(Incorporated in the United Kingdom)

Charlwoods Road, East Grinstead, West Sussex,
RH19 2HW, United Kingdom

(72) Inventor
James Walter Kennedy

(74) Agent and/or Address for Service
Boulton Wade & Tennant
27 Fumival Street, London, EC4A 1PQ,
United Kingdom

(51) INT CL⁵
G01F 11/00, A47K 5/12, B65D 83/76

(52) UK CL (Edition K)
B8N NG N24A6 N24C2B N24D11 N24D16
F1R RDC
F1W WAB W100 W203 W502
U1S S1377 S1426


(56) Documents cited
GB 2248888 A GB 1225343 A WO 87/00743 A1

(58) Field of search
UK CL (Edition K) B8N NAA NB NG NHCA NHCE
NHCZ NKD NM, F1R RDC, F1W WAB WCK
INT CL⁵ A47K, B65D, B67D, G01F, G07F


(54) Apparatus for discharging material from a container

(57) Apparatus for discharging material, such as air freshener or liquid soap, comprises a housing (10) for retaining in position a replaceable container (15) having a reciprocable button (16) for discharging material from the container through an outlet nozzle (18) in the button. Means (19) (Figure 4) are provided for at least depressing the discharge button (16) actuated by a battery operated electric motor. The container and battery or batteries for operating the electric motor are combined as a unit. The container (15) for the apparatus comprises a receptacle (42) (Figure 2) for the material to be discharged, and an outlet (43) in the receptacle for receiving a reciprocable button (16) for discharging material from the receptacle through an outlet nozzle (18) in the button. A separate compartment (33) in the container is provided for receiving the battery or batteries (30) required, the compartment having means (36, 37) allowing the battery or batteries, in use, to engage electrical contacts (31, 32) within the apparatus intended to receive the container (15).

FIG. 3.

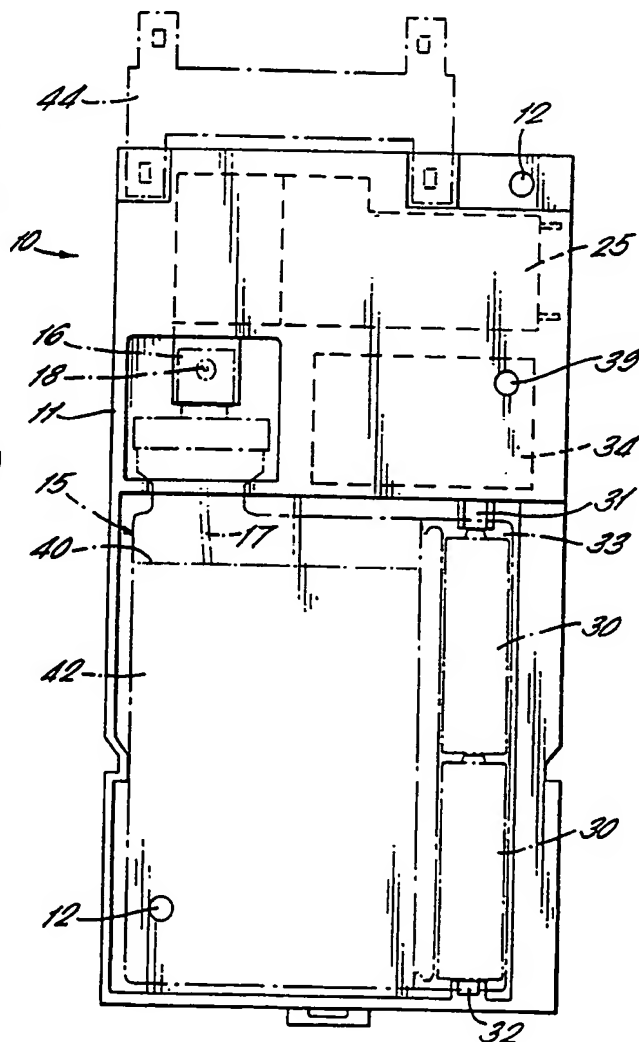

GB 2 256 422 A

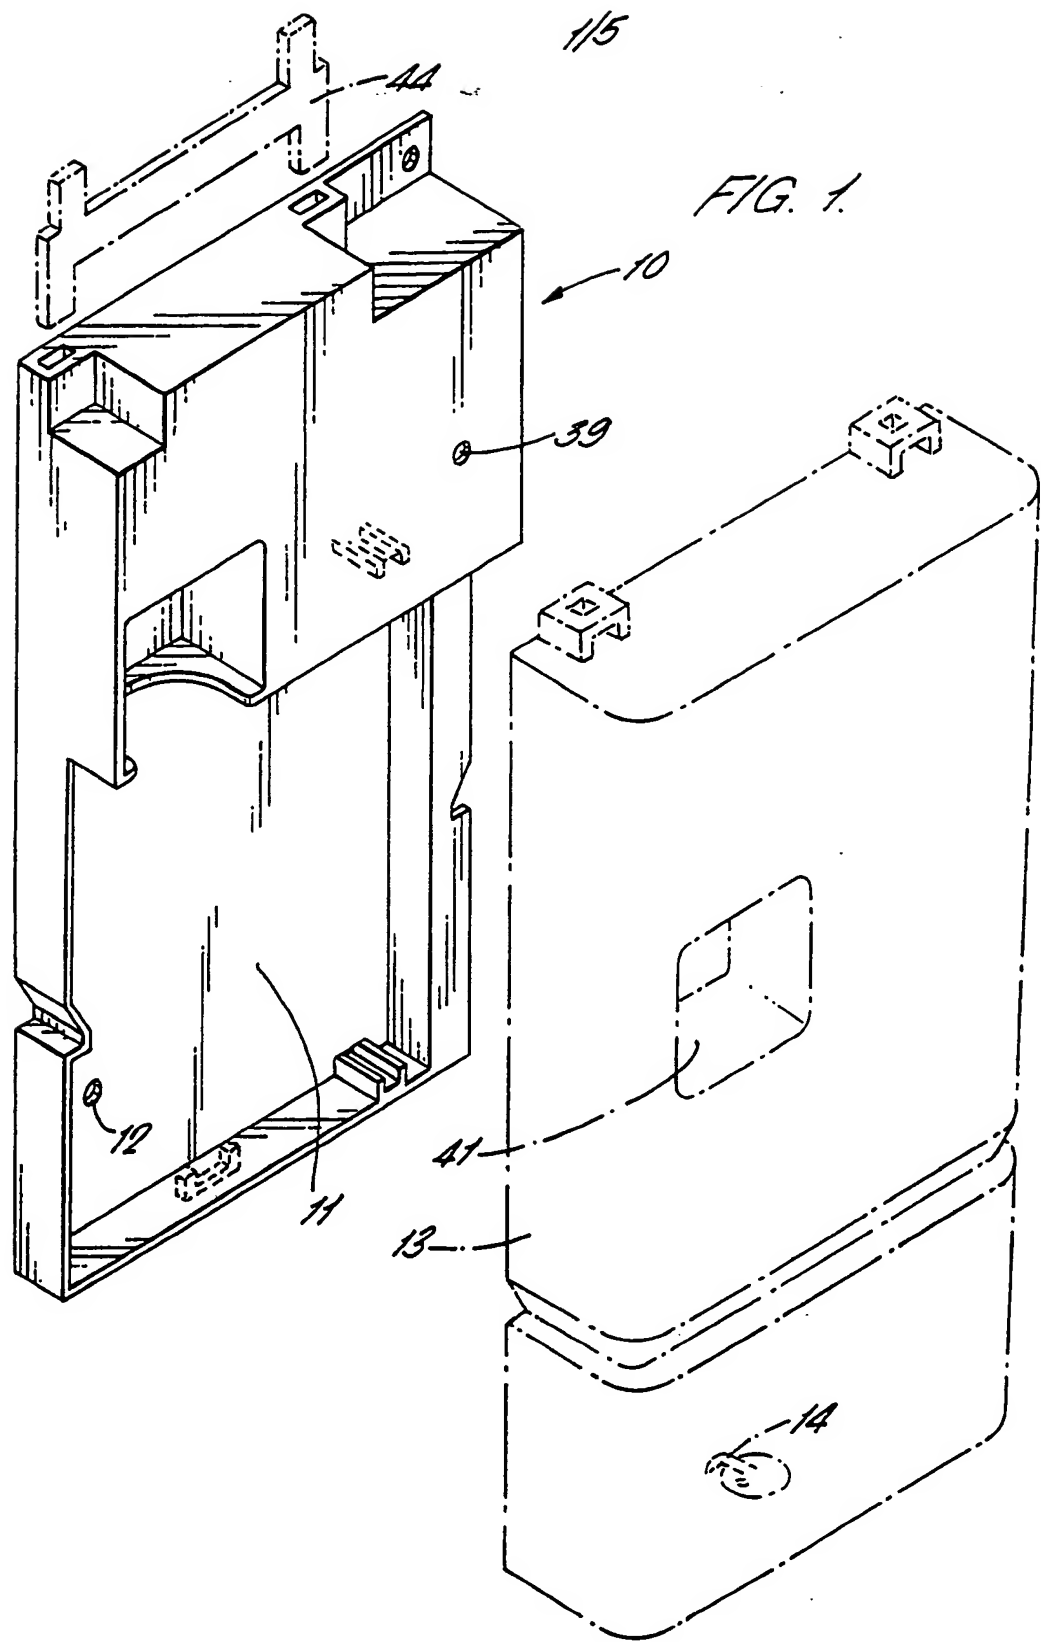

2/5



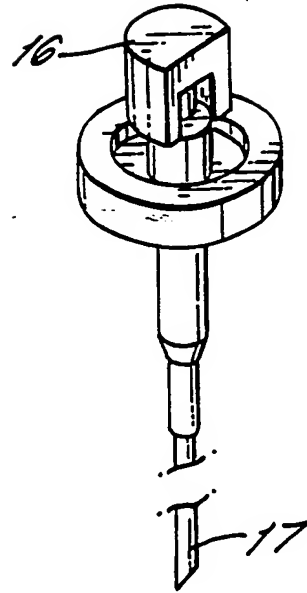


FIG. 2.

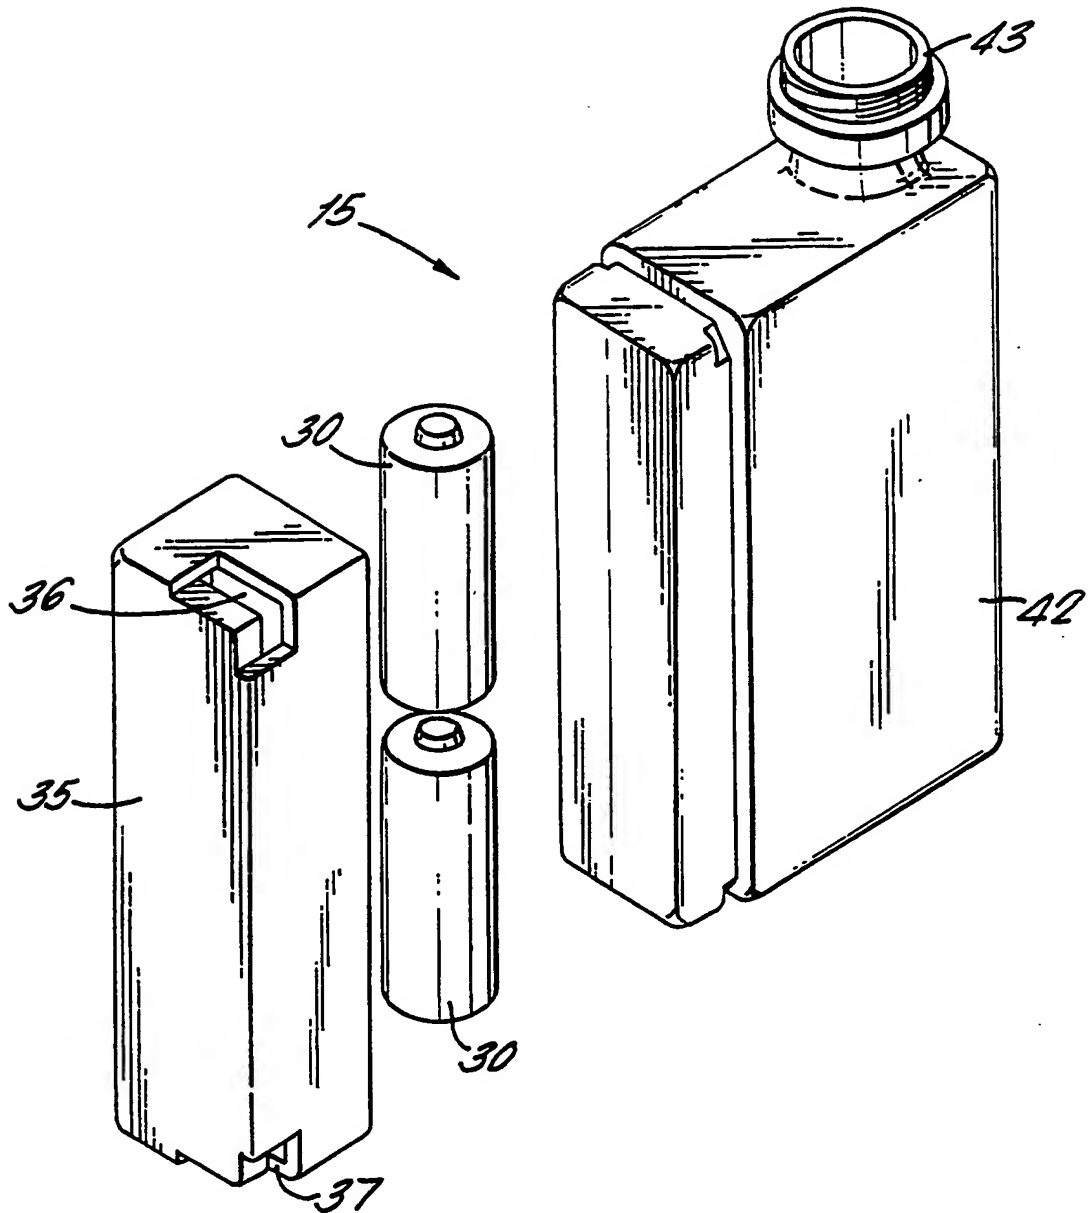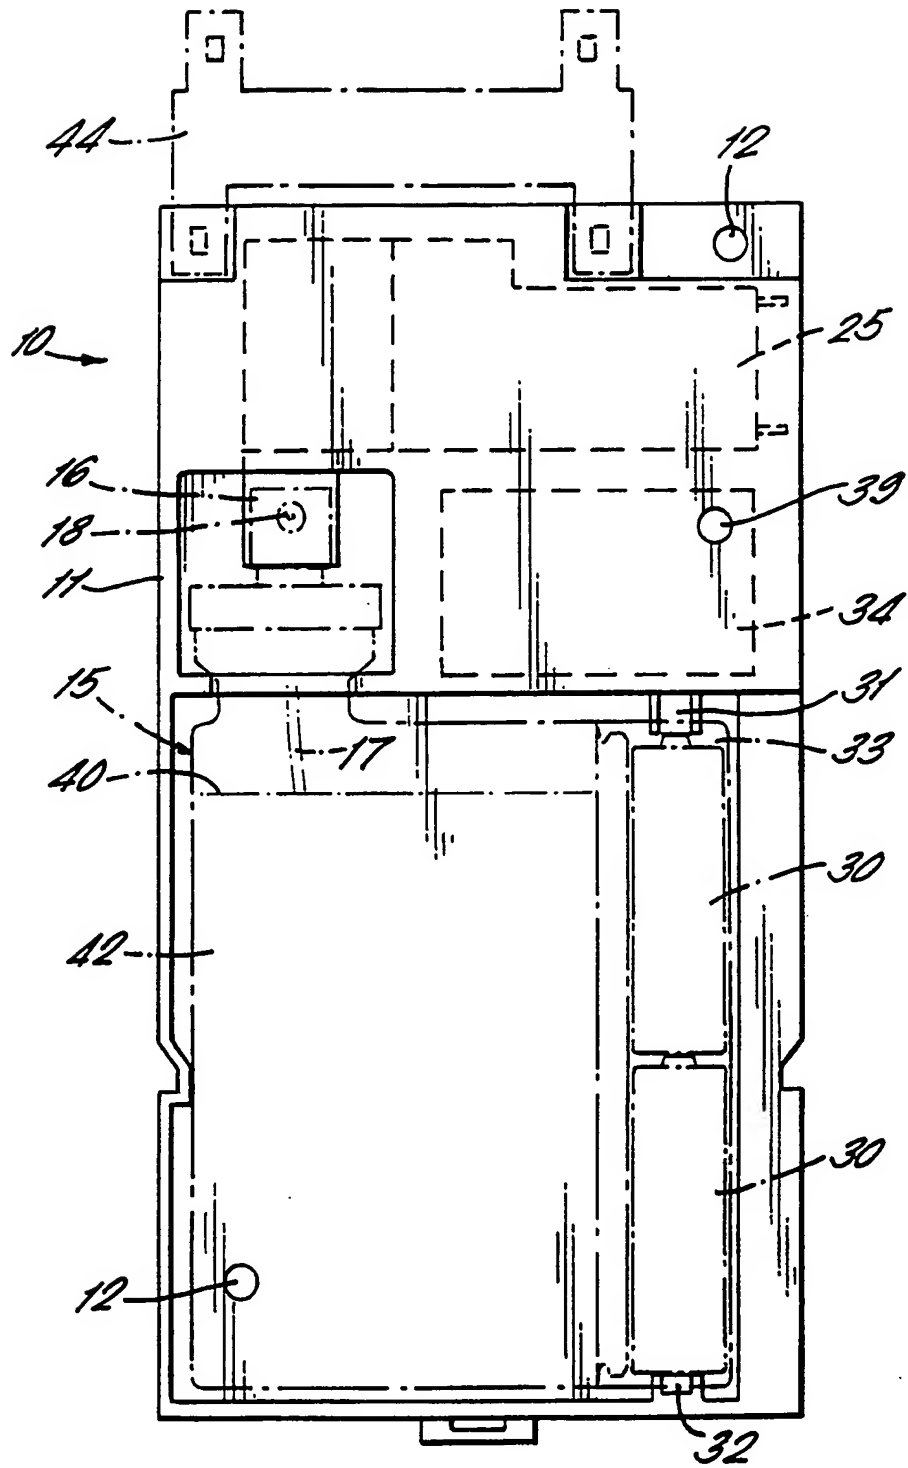

3/5

FIG. 3.




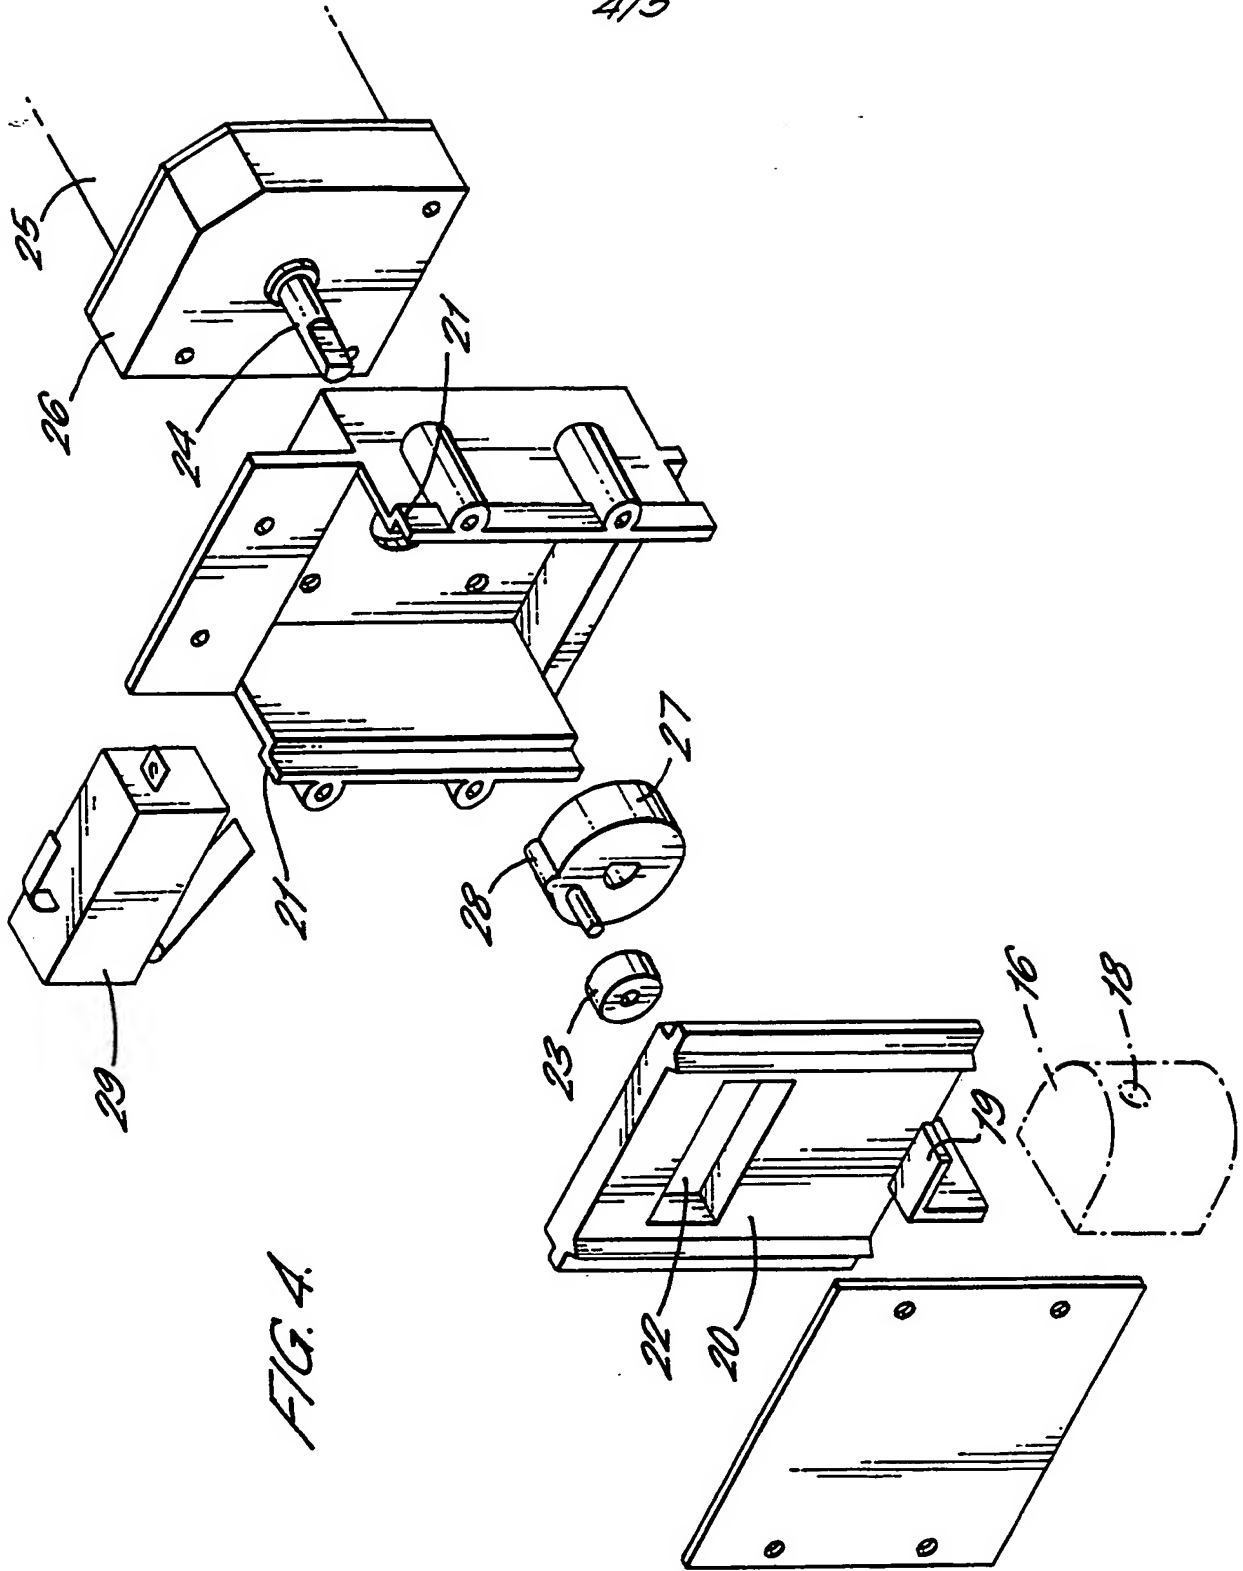


FIG. 4.

FIG. 5.

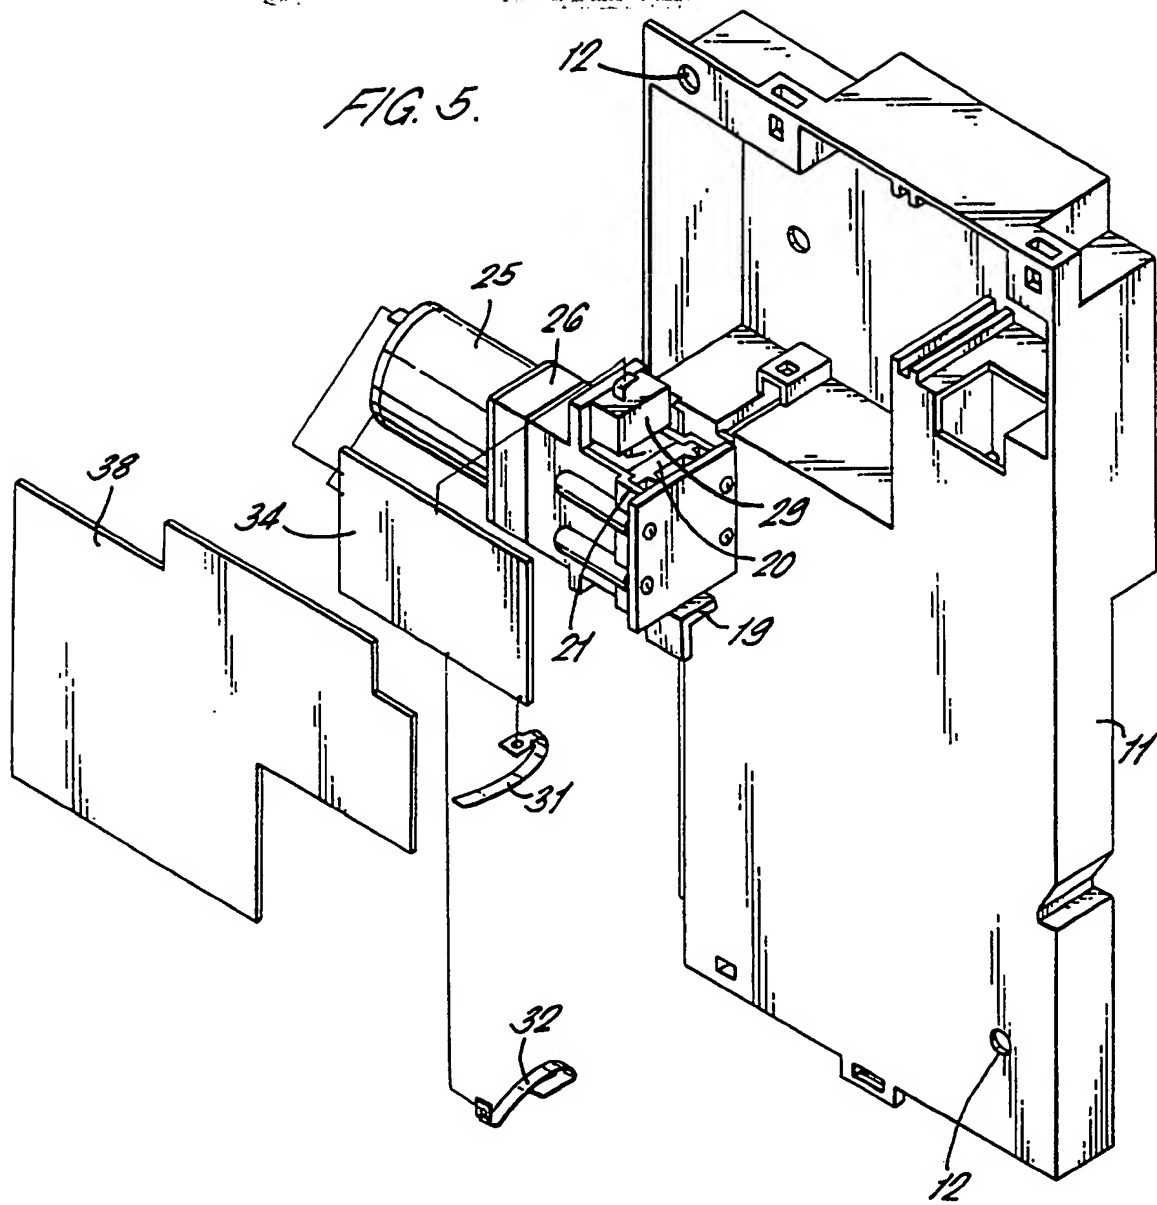

APPARATUS FOR DISCHARGING MATERIAL FROM
A CONTAINER AND CONTAINERS THEREFOR

This invention relates to apparatus for discharging
5 material from a container, and to containers therefor.
More particularly but not exclusively, the invention
relates to air freshener apparatus in which the
container is filled with air freshening material which
may be discharged into the atmosphere at predetermined
10 intervals.

In bathroom and toilet facilities in offices,
public places, domestic homes, it is known to install an
air freshener apparatus. Conveniently the apparatus is
wall mounted, and employs an electric motor to depress a
15 button to open a release valve thereby allowing a
measured amount of air freshening fluid to be discharged
from a pressurised container. The motor may be timed to
operate at predetermined intervals. The container also
contains a propellant which up to now has been a CSC gas
20 or a hydrocarbon gas, both of which may be deemed
environmentally unacceptable or a danger to health if
misused.

Therefore, instead of the discharge button opening
a release valve, the button may be associated with a
25 dose pump for pumping a metered amount of the material
from the bottom of the container to the outlet nozzle in
the button. Use of a propellant is thereby avoided.

It is also known to discharge other materials, e.g
liquid soap, from containers in a similar manner.

30 According to the invention there is provided
apparatus comprising a housing for retaining in position
a replaceable container having a reciprocable button for
discharging material from the container through an
outlet nozzle in the button, means for at least
35 depressing the discharge button actuated by a battery
operated electric motor, wherein the container and

battery or batteries for operating the electric motor are combined as a unit.

This means that the container and battery or batteries are adapted to be removed together from the apparatus when the container is empty, and replaced by a
5 new unit comprising a full container and an unused battery or batteries.

Preferably the container defines a battery compartment for receiving the battery or batteries
10 required and for aligning the battery or batteries so that when the combined unit is fitted into the apparatus, the battery or batteries engage electrical contacts connected to the electric motor.

In one embodiment of the invention, the discharge
15 button includes a dose pump for drawing the material from within the container to the outlet nozzle.

In the case of the apparatus being an air freshener, the container is filled with air freshening material. Preferably timing means are provided for
20 controlling the electric motor to be switched on at predetermined intervals.

It is also preferred that the reciprocable button is depressed and returned by means which are operated by one revolution of the output shaft of the electric
25 motor, which shaft carries a cam associated with a microswitch which stops the motor when the shaft has rotated through said one revolution.

The apparatus preferably includes control means for controlling the operation of the electric motor, which
30 control means act as a relay to bridge the microswitch to allow the electric motor to start in accordance with the timing means.

The timing means can preferably be varied to alter the predetermined intervals at which the electric motor
35 is switched on.

It is also preferred that, for test purposes, means

are provided which allow the electric motor to be triggered to operate through one cycle.

The invention also provides a container for apparatus as defined above, comprising a receptacle for the material to be discharged, an outlet in the receptacle for receiving a reciprocable button for discharging material from the receptacle through an outlet nozzle in the button, and a separate compartment for receiving the battery or batteries required, the compartment having means allowing the battery or batteries, in use, to engage electrical contacts within the apparatus intended to receive the container.

Preferably the battery compartment has opposed slots to enable the container to slide into position in the apparatus with the electrical contacts protruding through the slots into the compartment.

Before use, it is preferred that the receptacle is filled with the material to be discharged and a reciprocable discharge button is sealed into the outlet, and the compartment contains the required battery or batteries.

In a preferred embodiment, the material is air freshening material.

The discharge button preferably includes a dose pump for drawing the material from the receptacle to the outlet nozzle.

By way of example, a specific embodiment in accordance with the invention will be described with reference to the accompanying drawings in which:-

Figure 1 is a perspective view of the housing of apparatus for discharging air freshening material into the atmosphere;

Figure 2 shows an exploded view of a container and battery unit to be inserted into the housing of the apparatus of Figure 1;

Figure 3 shows the wall-mounted part of the housing

of the apparatus of Figure 1 with the container and battery unit of Figure 2 slid therein;

Figure 4 shows the plunger for depressing the discharge button of the container of Figure 2 and the motor drive for operating the plunger, in exploded view; and

Figure 5 is a rear view of the wall-mounted part of the housing showing the motor drive to the plunger contained therein, in exploded view.

10 This example concerns an air freshening apparatus which is suitable for use in bathroom/toilet facilities in offices or other business premises, hotels or the like, including domestic premises.

Referring to the drawings, the apparatus comprises a housing 10 having a rear part 11 suitable for being wall-mounted by screw holes 12, and to which a cover 13 is hinged by a nylon hinge 44. The cover 13 is held closed in this embodiment by a key releasable catch 14. In the lower part of the housing there is housed a plastic moulded container 15 having a receptacle portion 42 for receiving air freshening material which in this embodiment is mixed with a desired perfume and a detergent acting as a preservative. Crimped or otherwise sealed into a top outlet 43 of the receptacle 42 is a reciprocable discharge button 16 including a known type of dose pump interconnecting a dip tube 17 depending to the bottom of the receptacle and an outlet nozzle 18. The discharge button 16 has a D-shaped cross-section for contact by an angle shaped plunger 19 which both depresses the button and maintains the alignment of the outlet nozzle 18 relative to an aperture 41 in the housing through which, in use, the air freshening material is discharged into the atmosphere.

35 The plunger 19 is part of a slider plate 20 located for up and down movement in guides 21 and having a

transverse slot 22. Fitting within the slot 22 is a collar 23 eccentrically mounted on a cam 27, which is itself carried on the output shaft 24 of an electric motor 25 and gear box 26. One revolution of the shaft
5 24 will thereby effect one reciprocatory cycle of the plunger 19 which successively downwardly depresses and upwardly returns the discharge button 16. On the periphery of the cam 27 is a ridge or high point 28 which closes a microswitch 29 to switch off the electric
10 motor 25.

Power to the electric motor 25 is supplied by two batteries 30 received vertically in a compartment 33 of the container 15 which in this embodiment is disposed along one upright edge of the receptacle 42. The
15 batteries 30 engage upper and lower contacts 31, 32 respectively which are electrically connected to the control board 34 for the electric motor 25. The compartment 33 has a casing 35 which clips or is otherwise secured to the adjacent side edge of the
20 receptacle 42 of the container 15, and the casing has slots 36, 37 in its two ends through which the contacts 31, 32 project when the container 15 is inserted into the apparatus. The container 15 and batteries 30 in the compartment 33 of the container thereby comprise a unit
25 which is inserted into the housing of the apparatus and can be replaced when the container is empty or as desired, as a single item.

The control board 34 and electric motor 25 are housed above the container 15 and battery 30 unit, and
30 protected by a cover plate 38 which may be permanently sealed in position. The contact board is live when the batteries 30 are present and includes timing means which are present to switch on the electric motor 25 at predetermined intervals, e.g every 20 minutes, but which
35 may be varied to operate at other intervals between 5 minutes and 1 hour. When switching on the electric

motor 25, the control means also acts as a relay to bridge the microswitch 29 which is then closed, but which opens when the cam 27 begins to rotate through its one revolution of the operating cycle.

5 An aperture 39 allows a test probe to be inserted to operate the electric motor 25 through one cycle, bypassing the timing means, and to show that the apparatus is operative.

10 In operation, with the cover 12 open, a new container 15 and battery 30 unit is slid into the apparatus, the slots 36, 37 encompassing the battery contacts 31, 32. The battery contacts 31, 32 thereby protrude through the slots 36, 37 into contact with the batteries 30, and the discharge button 16 is positioned
15 beneath the plunger 19. If desired, a test probe (not shown) may be inserted in the aperture 39 to check that the electric motor 25 will switch on. The cover 13 is then closed.

20 Under the control of the timing means, at each predetermined interval, the electric motor 25 will be switched on and its output shaft 24 will rotate to reciprocate the plunger 19 and thereby the button 16. This will cause an amount of air freshening material 40 measured by the pump to be discharged through the
25 aperture 41 into the atmosphere. At the end of one revolution of the shaft 24, the high point 28 on the cam 27 will close the microswitch 20 and switch off the electric motor 25. This operating cycle will be repeated at the intervals set by the timing means. When
30 the container is empty, or as desired, the container and battery unit is replaced by a new unit comprising a full receptacle 42 and unused batteries 30. This system thus effectively prevents failure of the apparatus due to insufficient power remaining in the batteries.

35 The invention is not limited to the specific details of the example described above. For example,

the principle of the replacement unit of a container 15 and the required battery or batteries 30 may be applied to containers which rely on a propellant to discharge the material therefrom.

5 Similarly, the receptacle portion 42 of the container 15 may be filled with material other than an air freshening mixture, for example, liquid soap.

10

15

20

25

30

35

CLAIMS

1. Apparatus comprising a housing for retaining in
5 position a replaceable container having a reciprocable
button for discharging material from the container
through an outlet nozzle in the button, means for at
least depressing the discharge button actuated by a
battery operated electric motor wherein the container
10 and battery or batteries for operating the electric
motor are combined as a unit.
2. Apparatus as claimed in Claim 1, wherein the
container defines a battery compartment for receiving
15 the battery or batteries required and for aligning the
battery or batteries so that when the combined unit is
fitted into the apparatus, the battery or batteries
engage electrical contacts connected to the electric
motor.
- 20 3. Apparatus as claimed in Claim 1 or Claim 2, wherein
the discharge button includes a dose pump for drawing
the material from within the container to the outlet
nozzle.
- 25 4. Apparatus as claimed in any one of the preceding
claims, wherein the apparatus is an air freshener, the
container being filled with air freshening material.
- 30 5. Apparatus as claimed in Claim 4, including timing
means for controlling the electric motor to be switched
on at predetermined intervals.
6. Apparatus as claimed in Claim 5, wherein the
35 reciprocable button is depressed and returned by means
which are operated by one revolution of the output shaft

of the electric motor, which shaft carries a cam associated with a microswitch which stops the motor when the shaft has rotated through said one revolution.

5 7. Apparatus as claimed in Claim 6, including control means for controlling the operation of the electric motor, which control means act as a relay to bridge the microswitch to allow the electric motor to start in accordance with the timing means.

10

8. Apparatus as claimed in any one of the preceding claims, wherein the timing means can be varied to alter the predetermined intervals at which the electric motor is switched on.

15

9. Apparatus as claimed in any one of the preceding claims, including, for test purposes, means which allow the electric motor to be triggered to operate through one cycle.

20

10. Air freshener apparatus substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

25 11. A container for apparatus as claimed in Claim 1, comprising a receptacle for the material to be discharged, an outlet in the receptacle for receiving a reciprocable button for discharging material from the receptacle through an outlet nozzle in the button, and a
30 separate compartment for receiving the battery or batteries required, the compartment having means allowing the battery or batteries, in use, to engage electrical contacts within the apparatus intended to receive the container.

35

12. A container as claimed in Claim 11, wherein the

battery compartment has opposed slots to enable the container to slide into position in the apparatus with the electrical contacts protruding through the slots into the compartment.

5

13. A container as claimed in Claim 11 or Claim 12, wherein the receptacle is filled with the material to be discharged and a reciprocable discharge button is sealed into the outlet, and the compartment contains the
10 required battery or batteries.

14. A container as claimed in Claim 13, wherein the material is air freshening material.

15 15. A container as claimed in Claim 13 or Claim 14, wherein the discharge button includes a dose pump for drawing the material from the receptacle to the outlet nozzle.

20 16. A container substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

25

30

35

**Examiner's report to the Comptroller under
Section 17 (The Search Report)**

GB 9108993.8

Relevant Technical fields

(i) UK Cl (Edition K) B8N NAA NB NG NHCA NHCE NHCZ
NKD NM
(ii) Int Cl (Edition 5) F1W WAB WCK F1R RDC
A47K B67D B65D G01F G07F

Search Examiner

R F PHAROAH

Databases (see over)

(i) UK Patent Office

(ii)

Date of Search

4 AUGUST 1992

Documents considered relevant following a search in respect of claims

1-16

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
X	WO A1 87/00743 (L HOFFMAN) see Figures 2, 16	1, 2, 11, 12
X E	GB A 2248888 (KONTROL AIR NEW ZEALAND)	1, 4, 5, 8
X	GB 1225343 (TAISHO IKETANI) see Figure 3	11



Category	Identity of document and relevant passages	Relevant to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).